


# Storm Series of Fans

## 55" Fiberglass Exhaust Fans

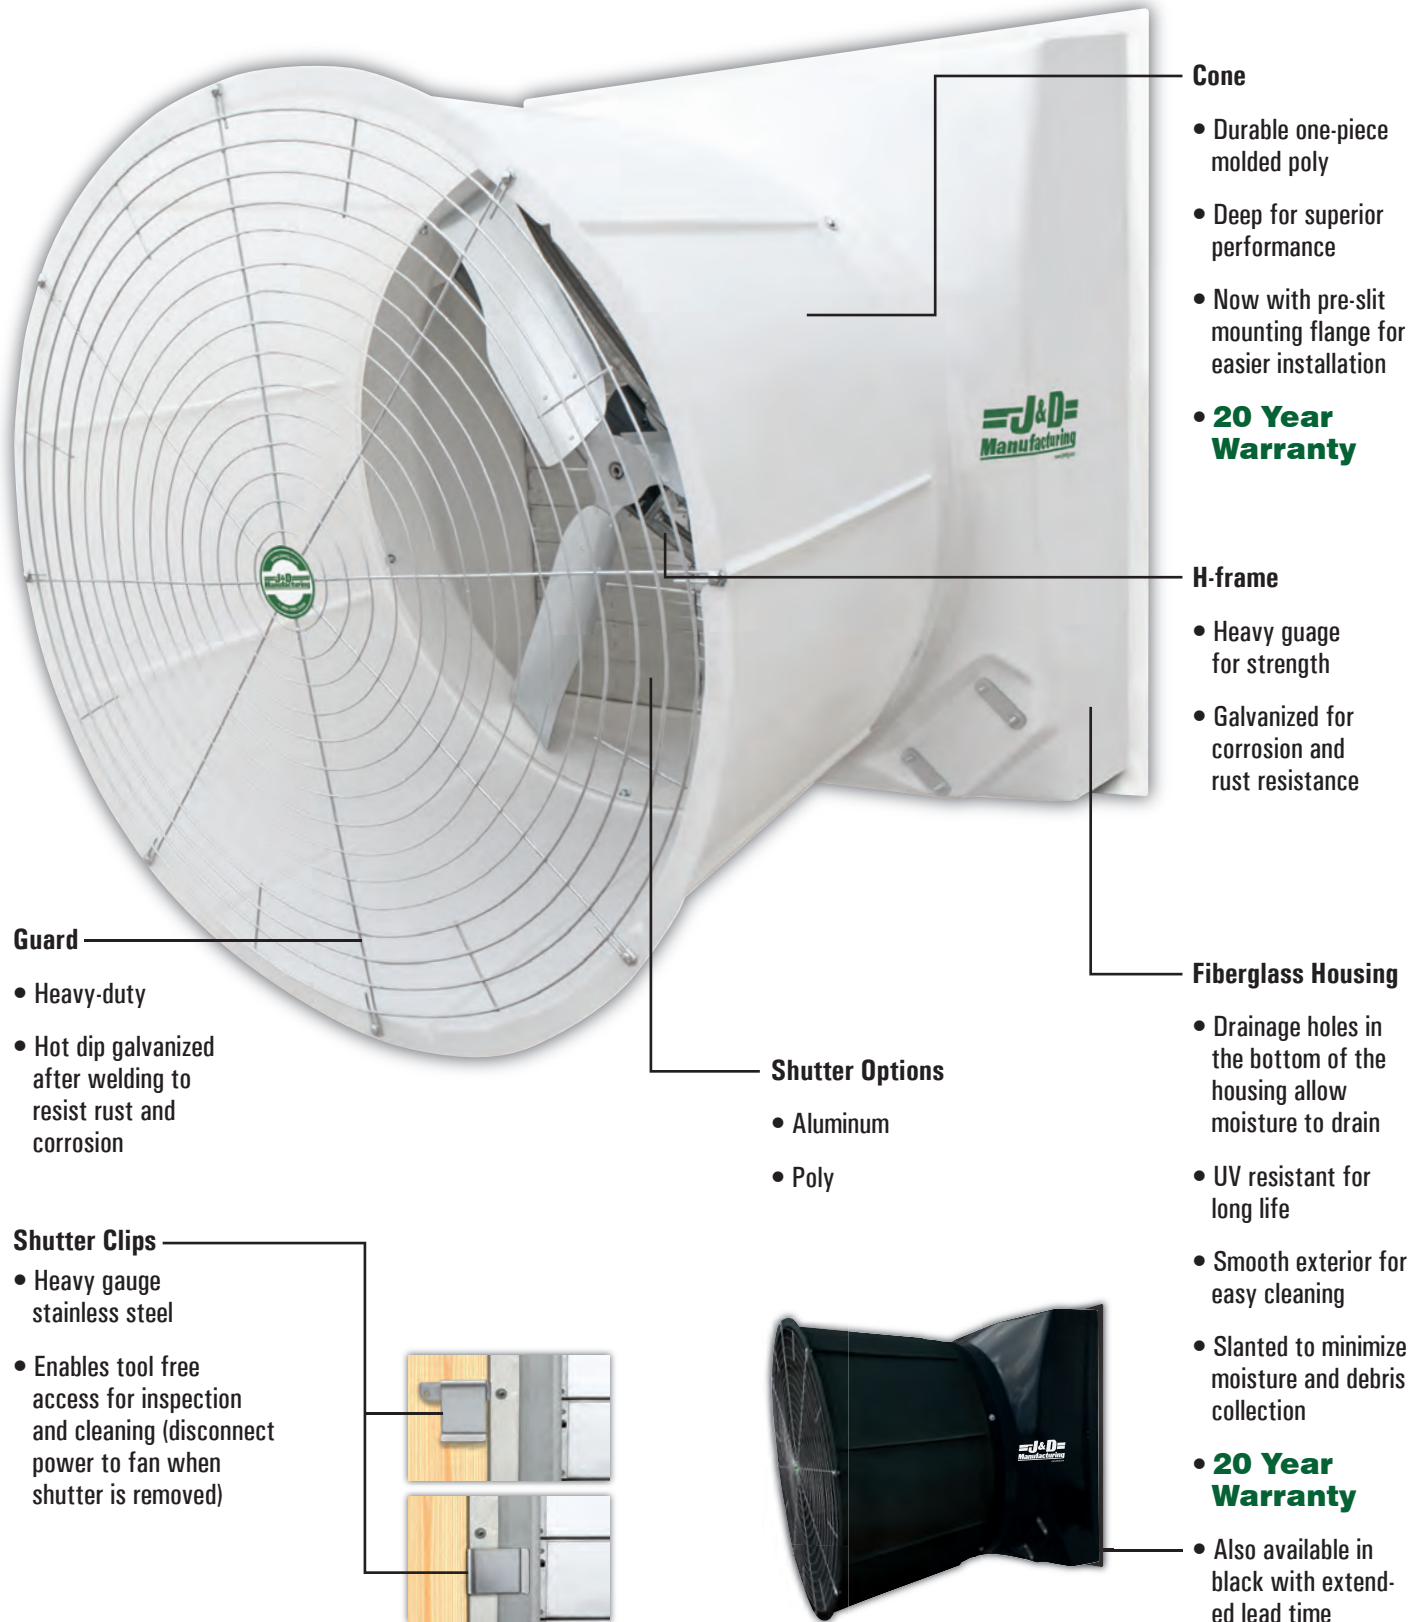

**Cone**

- Durable one-piece molded poly
- Deep for superior performance
- Now with pre-slit mounting flange for easier installation
- **20 Year Warranty**

**H-frame**

- Heavy gauge for strength
- Galvanized for corrosion and rust resistance

**Fiberglass Housing**

- Drainage holes in the bottom of the housing allow moisture to drain
- UV resistant for long life
- Smooth exterior for easy cleaning
- Slanted to minimize moisture and debris collection
- **20 Year Warranty**
- Also available in black with extended lead time

**Guard**

- Heavy-duty
- Hot dip galvanized after welding to resist rust and corrosion

**Shutter Options**

- Aluminum
- Poly

**Shutter Clips**

- Heavy gauge stainless steel
- Enables tool free access for inspection and cleaning (disconnect power to fan when shutter is removed)



**⚠ WARNING:** This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov/product](http://www.P65Warnings.ca.gov/product).

# Storm Torque

## 55" Fiberglass Exhaust Fan with Torque Drive

### Save Time & Money

**No Belts to Change**


**No Pulleys to Maintain**

**No Greasing Motor or Bearings**

### Features

- Maintains a continuous high level of performance with **no power loss or reduction from aging belts and pulleys**
- VFD (Variable Frequency Drive) compatible and recommended for increased energy savings and longer life (VFD not included)
- Smooth and quiet operation

- Motor**
- Premium-efficient
  - Industrial 2 HP
- Prop**
- High-performance
  - 3 blade
  - Galvanized

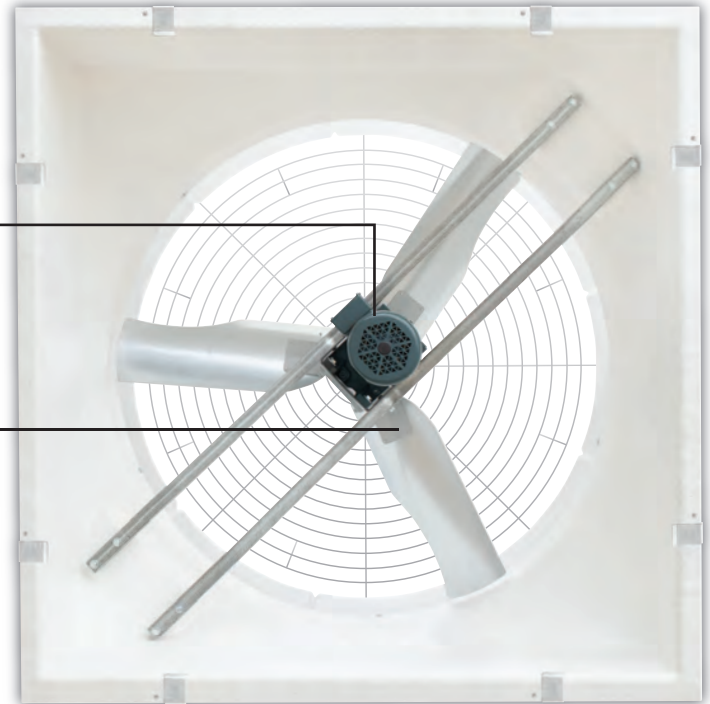

Shown with shutter removed (Never permit power to fan with shutter removed)

Part #	Sz	Ph	Spd	@ 0.10" SP		Drive	Prop
				CFM	Watt		
<b>Three Phase</b>							
<b>Aluminum Shutter</b>							
VMTA55G3C23-SL	55"	3	1	<b>29,902</b>	<b>17.7</b>	Torque	3-Glv
<b>Poly Shutter</b>							
VMTP55G3C23-SL	55"	3	1	<b>27,986</b>	<b>16.2</b>	Torque	3-Glv
<b>Accessories</b>							
VFD240V03013A	VFD, 190-240V, 3PH/1PH, with RFI Filter						
VFD480V03030B	VFD, 380-480V, 3PH, with RFI Filter						
VRS1260	Shutter Motor Kit, 12"-60" Al. Shutter						
VRS1260-C	Shutter Motor Kit, 12"-60" Al. Shutter, with Cord						
<b>Black Versions (requires extended lead time)</b>							
Add "-B" to end of part # - Example: VMTA55G3C23-SL-B							

**Bold red text is data based on testing performed by an accredited lab using ANSI/AMCA 210-07 standard.**

**NOTE:** It is highly recommended that a motorized shutter kit be installed to open shutter when fan is operating at 40% or lower



**⚠ WARNING:** This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov/product](http://www.P65Warnings.ca.gov/product).

# Storm

## Belt Drive 55" Fiberglass Exhaust Fan



### Motor


- High-efficiency
- Totally enclosed
- 1 HP, 1 1/2 HP or 2 HP

### Belt Tensioner

- Automotive style
- Toolless belt changing

### Prop Options

- High-performance cast aluminum prop with **Lifetime Warranty**
- Galvanized prop with **1 Year Warranty**

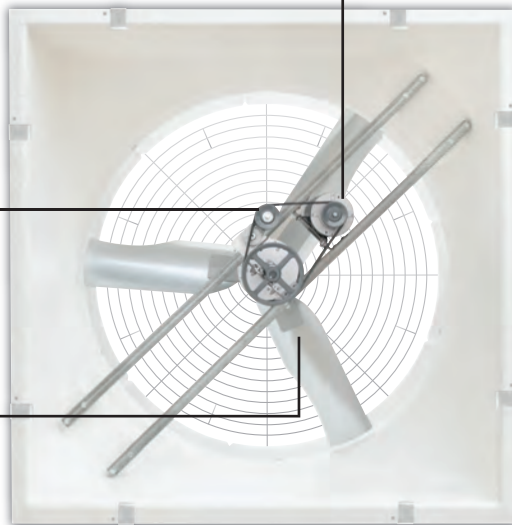

Shown with shutter removed  
(Never permit power to fan with shutter removed)

### Shaft Bearings

- Custom pre-lubricated
- Featuring an eccentric locking collar with set screw
- Permanently sealed and rubber mounted for smooth operation
- Covered by a **3 Year Warranty**



Part #	Sz	Ph	Spd	@ 0.10" SP		Drive	Prop
				CFM	Watt		
<b>Single Phase</b>							
<b>Aluminum Shutter</b>							
VSA55G3C11E-SL	55"	1	1	<b>21,189</b>	<b>23.4</b>	Belt	3-Glv
VSA55A3C151-SL	55"	1	1	<b>24,056</b>	<b>19.0</b>	Belt	3-CA
VSA55G3C151-SL	55"	1	1	<b>23,985</b>	<b>21.8</b>	Belt	3-Glv
** VSA55A3C21-SL	55"	1	1	<b>28,347</b>	<b>13.8</b>	Belt	3-CA
VSA55G3C21-SL	55"	1	1	<b>27,546</b>	<b>16.1</b>	Belt	3-Glv
<b>Poly Shutter</b>							
VSP55G3C11E-SL	55"	1	1	<b>19,799</b>	<b>21.3</b>	Belt	3-Glv
** VSP55A3C151-SL	55"	1	1	<b>22,348</b>	<b>17.6</b>	Belt	3-CA
VSP55G3C151-SL	55"	1	1	<b>22,903</b>	<b>20.4</b>	Belt	3-Glv
VSP55A3C21-SL	55"	1	1	<b>27,087</b>	<b>13.2</b>	Belt	3-CA
VSP55G3C21-SL	55"	1	1	<b>26,601</b>	<b>15.2</b>	Belt	3-Glv
<b>Three Phase</b>							
<b>Aluminum Shutter</b>							
VSA55A3C153-SL	55"	3	1	<b>23,774</b>	<b>19.3</b>	Belt	3-CA
VSA55G3C153E-SL	55"	3	1	<b>23,844</b>	<b>22.0</b>	Belt	3-Glv
** VSA55A3C23-SL	55"	3	1	<b>31,060</b>	<b>13.6</b>	Belt	3-CA
** VSA55A3C23E-SL	55"	3	1	<b>28,515</b>	<b>15.4</b>	Belt	3-CA
** VSA55G3C23-SL	55"	3	1	<b>31,402</b>	<b>16.0</b>	Belt	3-Glv
VSA55G3C23E-SL	55"	3	1	<b>26,411</b>	<b>20.6</b>	Belt	3-Glv
<b>Poly Shutter</b>							
VSP55A3C153-SL	55"	3	1	<b>22,624</b>	<b>17.9</b>	Belt	3-CA
VSP55G3C153E-SL	55"	3	1	<b>22,746</b>	<b>20.5</b>	Belt	3-Glv
** VSP55A3C23-SL	55"	3	1	<b>30,058</b>	<b>12.8</b>	Belt	3-CA
VSP55A3C23E-SL	55"	3	1	<b>27,250</b>	<b>14.7</b>	Belt	3-CA
VSP55G3C23-SL	55"	3	1	<b>30,471</b>	<b>15.1</b>	Belt	3-Glv
VSP55G3C23E-SL	55"	3	1	<b>25,475</b>	<b>19.5</b>	Belt	3-Glv
<b>Non Slant Wall Versions</b>							
Remove "-SL" at end of part # - Example: VSSP55A3C23							
<b>Black Versions (requires extended lead time)</b>							
Add "-B" to end of part # - Example: VSSP55A3C23-SL-B							

\*\* Best sellers of 2018-19

**Bold red text is data based on testing performed by an accredited lab using ANSI/AMCA Standard 210-07**

**⚠ WARNING:** This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov/product](http://www.P65Warnings.ca.gov/product).